

ART. 0-ITD6101EST-CR

Miscelatore vasca a 2 vie incasso con supporto doccia integrato
2-way built-in bath mixer with integrated shower support

Miscelatore vasca incasso, con interasse bocca da 138 mm. Cartuccia termostatica, deviatore a rotazione con chiusura a 2 uscite. Dotato di doccia monogetto Stick in ottone. Presa acqua con supporto per doccetta. Flessibile in PVC da 150 cm. Ingressi G 1/2". Finitura standard in cromo.

Built-in bath mixer, with spout center distance of 138 mm. Thermostatic cartridge, rotary diverter with 2 outlet closure. Equipped with Stick single jet brass shower. Water connection with shower holder. 150cm PVC hose. G 1/2" inlets. Standard chrome finish.



FINITURE / FINISHES



PARTE INCASSO / CONCEALED PART

W6100

Gruppo incasso termostatico vasca 2 vie con bocca, piastra e supporto doccia. Deviatore a rotazione con chiusura. Ingressi G 1/2".


Concealed part for 2-way thermostatic tub mixer with spout, plate and hand shower holder, automatic diverter with shut-off. Inlets G 1/2".

RICAMBI / SPARE PARTS

ORIC046 Cartuccia termostatica Ø34 h 96; ORIC081 Cartuccia deviatrice 1 via Ø29; ORIC086 Aeratore secret M18,5×1; ORIC091 Chiave di montaggio per aeratore secret M18,5×1

ORIC046 Thermostatic cartridge Ø34 h 96; ORIC081 Diverter cartridge 1 way Ø29; ORIC086 Secret aerator M18.5×1; ORIC091 Mounting wrench for secret aerator M18.5×1

Miscelatore vasca a 2 vie incasso con supporto doccia integrato
2-way built-in bath mixer with integrated shower support

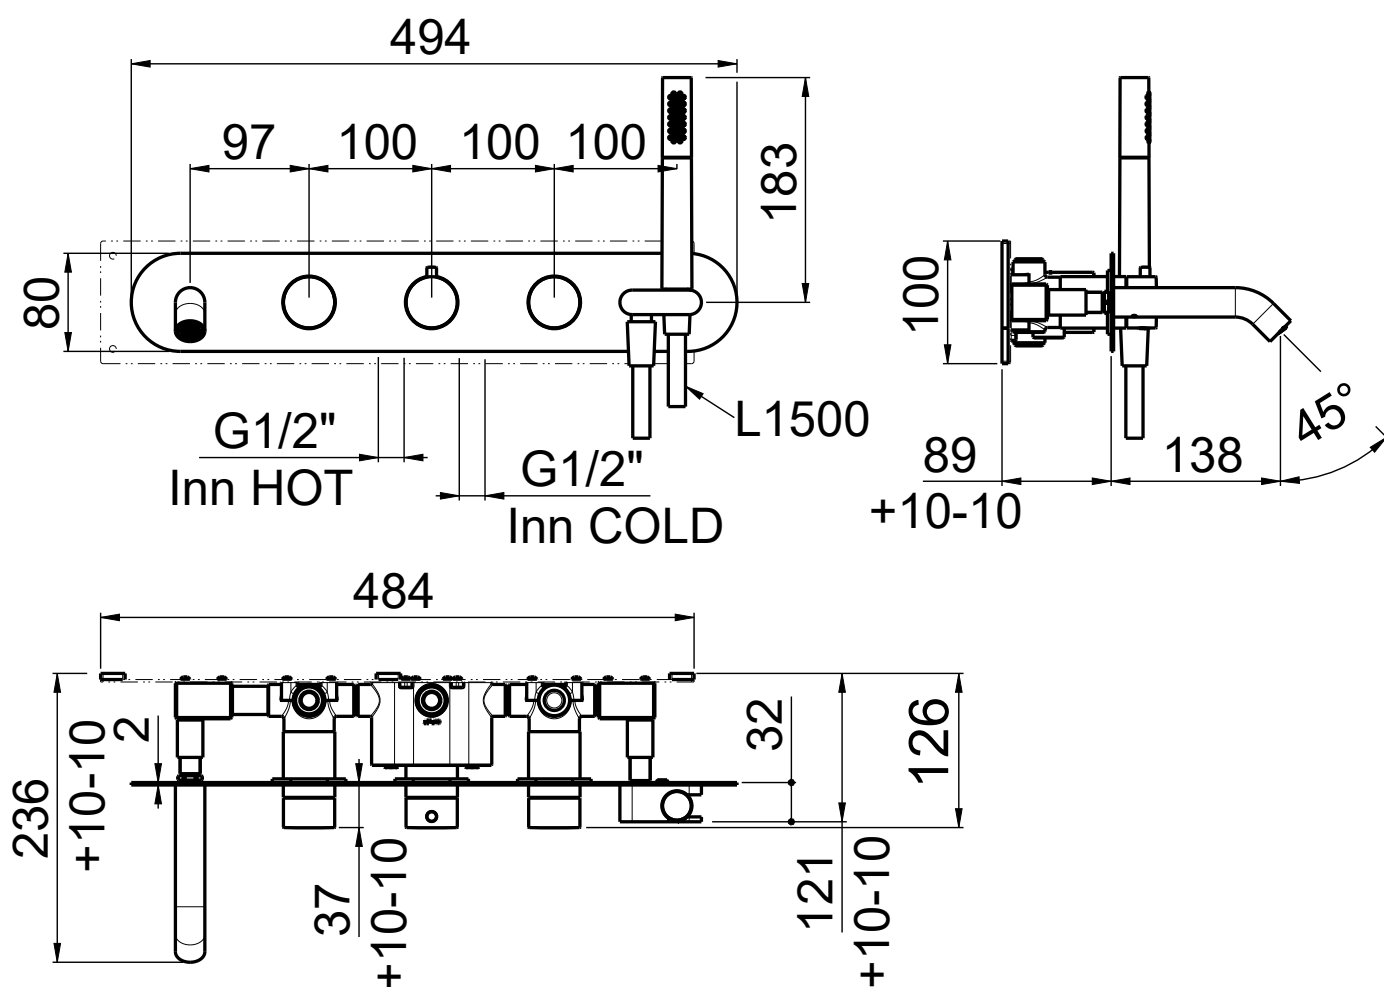

ART. 0-ITD6101EST-CR

Miscelatore vasca a 2 vie incasso con supporto doccia integrato
2-way built-in bath mixer with integrated shower support

TABELLE DI PORTATA / FLOW RATE TABLES

LEGENDA / LEGEND

Q1 = portata 1 uscita / *flow rate 1 outlet*
Q2 = portata 2 uscite / *flow rate 2 outlets*
Q3 = portata 3 uscite / *flow rate 3 outlets*
Q4 = portata 4 uscite / *flow rate 4 outlets*
Q5 = portata 5 uscite / *flow rate 5 outlets*
Q6 = portata 6 uscite / *flow rate 6 outlets*

Q7 = portata bocca vasca / *bathtub spout flow rate*
Q8 = portata doccia / *shower flow rate*
Q9 = portata uscita libera / *outlet free flow rate*

Q1/2F = portata uscita 1/2" F / *flow rate outlet 1/2" F*
Q3/4F = portata uscita 3/4" F / *flow rate outlet 3/4" F*

p (bar)	0,5	1	2	3
Q7 (l-min)	7	10	14	17
Q8 (l-min)	6,5	8	12	14